

2.4G LED RGB Controller

FC CE RoHS


[质保5年]



Main Characteristics

V7 RF RGB Remote Control

Remote Option: RGB, 4 zones control
 Working Voltage: 3Vdc (Battery CR2032)
 Wireless Signal: RF 2.4GHz
 Working Temperature: -30 ~55
 Package Size: L150xW46xH18(mm)
 Weight(G.W.): 85g

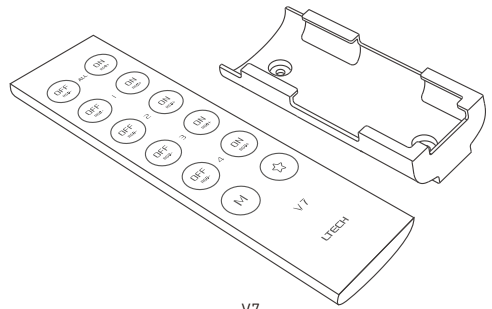


V7

R4-5A CV Receiver

Input Voltage: 5~24Vdc
 Max Current Load: 5A × 4CH Max. 20A
 Max Output Power: 100W/240W/480W(5V/12V/24V)
 Working Temperature: -30 ~55
 Package Size: L178xW48xH33(mm)
 Weight(G.W.): 150g

R4-CC CC Receiver

Input Voltage: 12~48Vdc
 Output Voltage: 3~46Vdc
 Output Current: CC 350/700/1050mA×4CH
 Output Power: 1.05W~48.3W×4CH Max 193.2W
 Working Temperature: -30 ~55
 Package Size: L178xW48xH33(mm)
 Weight(G.W.): 165g

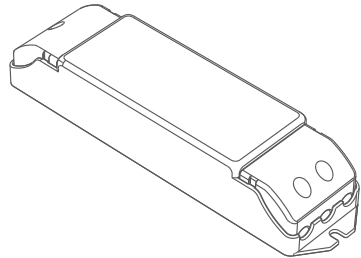


R4-5A/R4-CC


Note: Receiver is sold separately.

Dimensions


Unit: mm



V7




Holder




R4-5A/R4-CC

Operating Instruction for Remote:

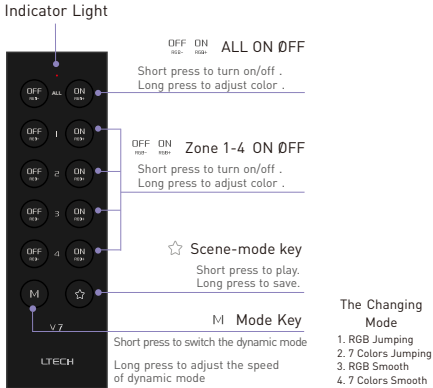


Match/Clear code between remotes

Match code:

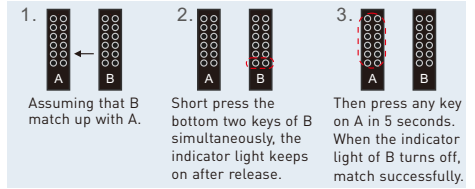


Clear code:



Match/Clear code between remote and receiver


Match code:

1. Short press "ID learning button" on receiver, the running light keeps on.
2. Press the matching zone key "ON" or "OFF" on remote, the running light on receiver flicker several times, match successfully.




Clear code:

Long press "ID learning button" on receiver for 5 seconds, If the running light flicker several times, deactivate the matching successfully.



Wiring Diagram :

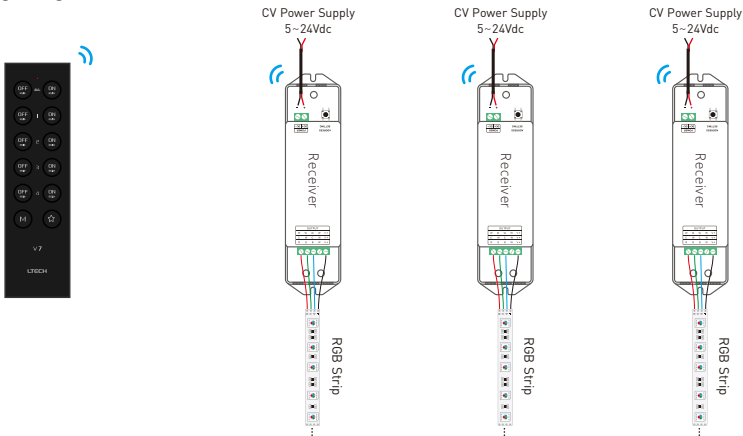

Attention:

- Please replace battery if the remote becomes insensitive or control distance is shortened.
- Please take out battery for long time unused.