


Circles recessed trimless

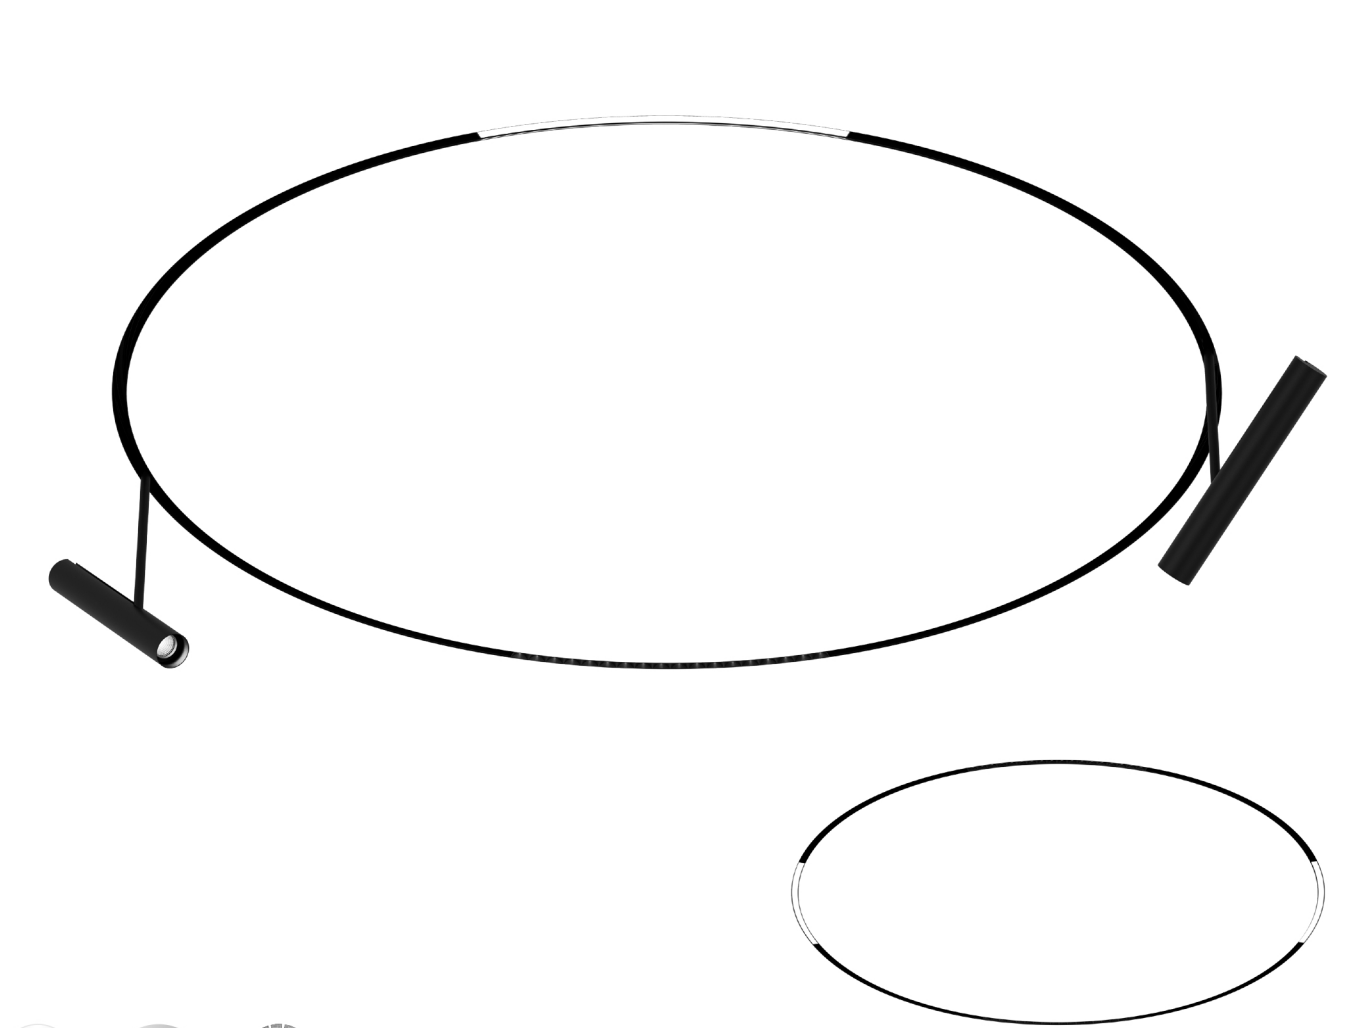

DALI

DT8

TRIAC

DIMMABLE

0-10V

CASAMBI

DALI

0-10V

Triac

ON/OFF

High

CRI

III

IP20

CE


F

- installation on Low Voltage Track(48V)
- die-cast aluminum body with powder-coated finishing
- body itself serving as a wonderful glare controller with Grille Louvre
- installed completely inside of the high profile tracks, invisible to blend seamlessly into decorative spaces
- same texture as the suspended tracks result in a cleaner, undisturbed and refined application
- built-in DC/DC converters, offering DALI(DT6&DT8), Triac, Casambi and 0-10V dimmable solutions


TR11.MC18



source W	system W	lm/W	optic	CRI
12.5W	15W	45lm/W	32°	>90
CCT				
2700K/3000K/4000K/1800-4000K/2700K-6500K				
Finishing(body)				
Standard				

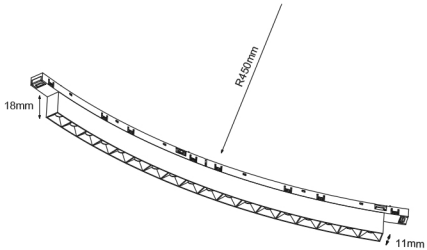


OPTICS




M
α 32°

TR11.MC19

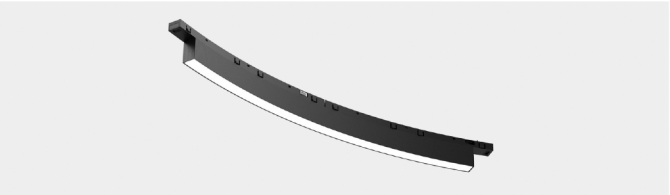

source W	system W	lm/W	optic	CRI
12.5W	15W	45lm/W	114°	>90
CCT				
2700K/3000K/4000K/1800-4000K/2700K-6500K				
Finishing(body)				
Standard				

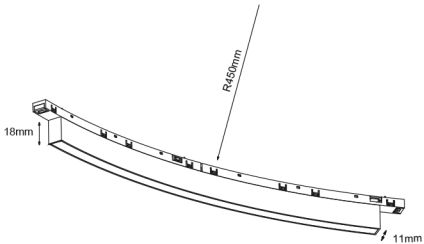

OPTICS



EWf
α 114°