






Dimension

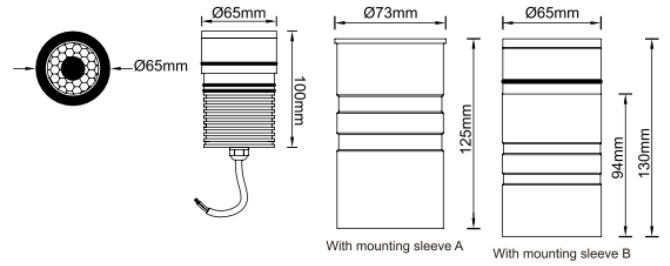


Light Distribution Curve (3000K, 10°)

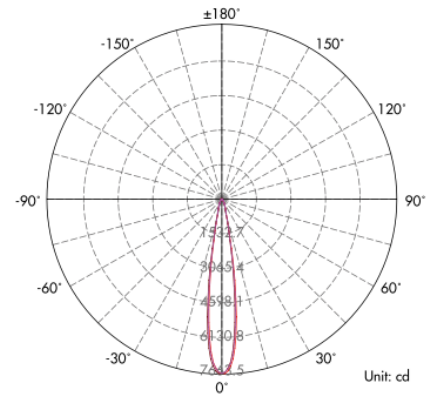

Lux distance Curve (3000K, 10°)

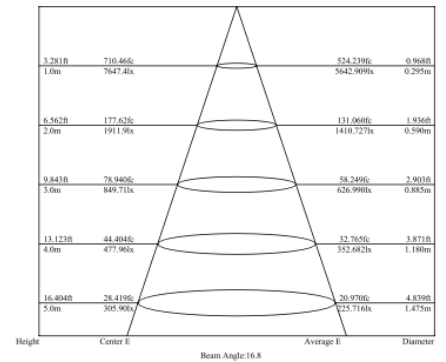

Illumination Picture (10°)

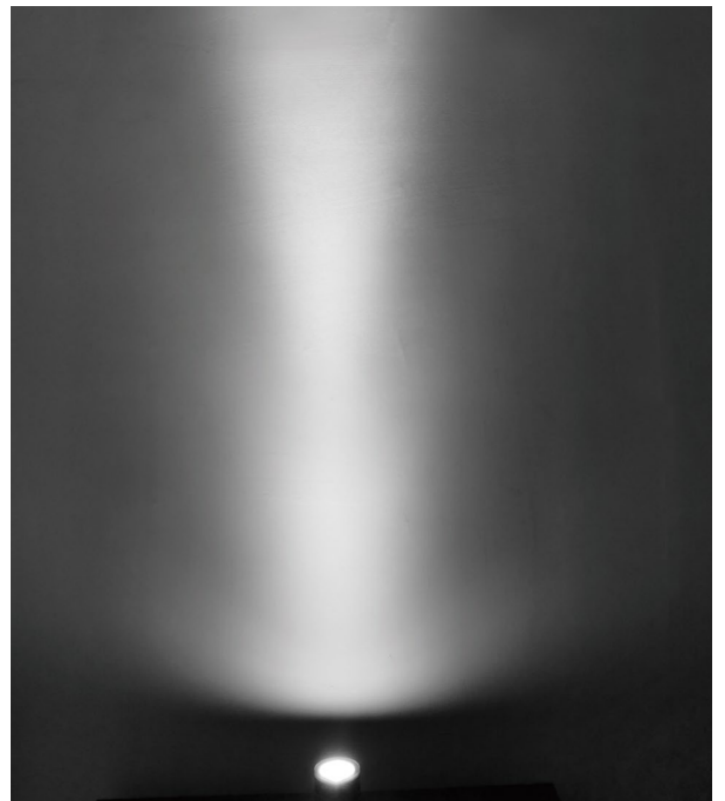

CE **RoHS COMPLIANT** **IP67 IK06**

3 Years Warranty

Whole glass surface !
Two different installation possibilities with mounting sleeve A or B.

Parameter

General Data	
Item No.	EES12-RIM
Power	12 Watts ± 10%
LED type	1 PC 12W CREE COB LED CXA1507
Luminous flux	1000lm ± 10%
CCT	2700K, 3000K, 4000K, 6500K
CRI	80+
Beam angle	10°, 23°, 36° (100° frosted glass optional)
Dimension	Ø65x100 (mm) Diameter x Height
Cut out	Ø73mm for mounting sleeve A, Ø65mm for mounting sleeve B
Net weight	0.8 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1mm square
Driver	Low voltage constant current output, excluding the AC transformer
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Whole glass
Glass	Step tempered Glass. T=6mm.
Loading capacity	300 kgs
Cable Gland	PG gland
Gasket	PMQ silicone seal
Accessories	
Mounting Sleeve	Passivated (Anodizing) Aluminum. Dark grey. Type A or B optional
Suction cap	With suction cap for pulling the lamp