

Light Pad



CASAMBI

DALI

0-10V

Triac

ON/OFF

High CRI


IP20

CE


F

- installation on Low Voltage Track(48V)
- die-cast aluminum case with powder-coated finishing
- designed optical lens ensure high efficiency and excellent glare control
- high vision comfort with the sand power-coated aluminum louvre
- built-in DC/DC converters, offering DALI(DT6&DT8), Triac, Casambi and 0-10V dimmable solutions
- long-stem & short-stem are available for elegant applications

OPTICS

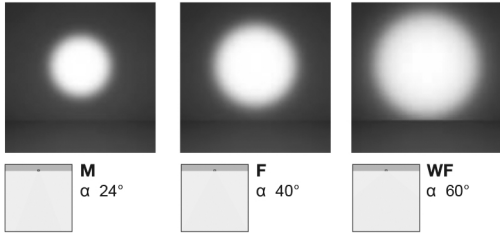


TR11.M13 (short-stem for low-profile tracks only)



source W	system W	lm/W	optic	CRI
18.5W	20W	75lm/W	24°/40°/60°	>90
CCT				
2700K/3000K/4000K/2700K-6500K				
Finishing(base)				
White/Black				
Finishing(pad)				
Standard				

TR11.M13-1



source W	system W	lm/W	optic	CRI
18.5W	20W	75lm/W	24°/40°/60°	>90
CCT				
2700K/3000K/4000K/2700K-6500K				
Finishing(base)				
White/Black				
Finishing(pad)				
Standard				