


Model 20

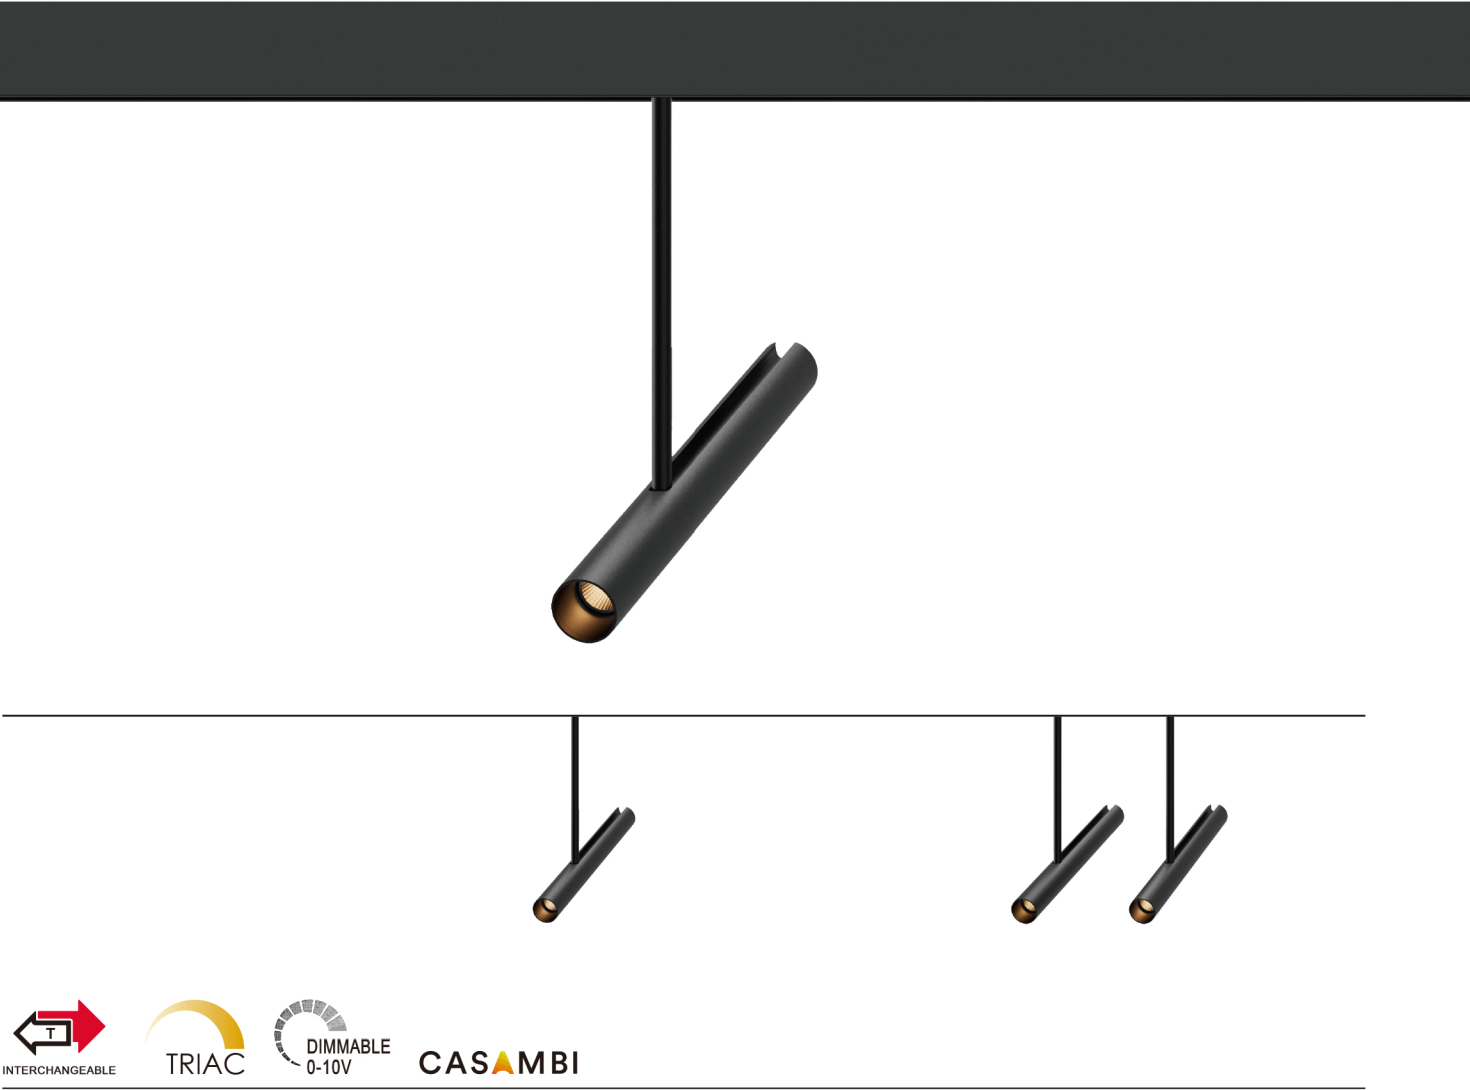

↔
INTERCHANGEABLE

TRIAC

DIMMABLE
0-10V

CASAMBI

DALI

0-10V

Triac


ON/OFF

High CRI

CE


- installation on Low Voltage Track(48V)
- extruded aluminum tube(case) interchangeable without needing tools, available in standard, luxury and premium finishings
- built-in DC/DC converters, offering DALI(DT6), Triac, Casambi and 0-10V dimmable solutions
- dual-head modules to enhance power, light output and aesthetic excellence

OPTICS



TR11.M3-XS

source W	system W	lm/W	optic	CRI
6W	7W	45lm/W	24°/36°	>90
CCT				
2700K/3000K/4000K				
Finishing(base)				
White/Black				
Finishing(tube)				
Standard / Luxury / Premium				



TR11.M3-XSD

source W	system W	lm/W	optic	CRI
6W×2	7W×2	45lm/W	24°/36°	>90
CCT				
2700K/3000K/4000K				
Finishing(base)				
White/Black				
Finishing(tube)				
Standard / Luxury / Premium				

