


Model 60

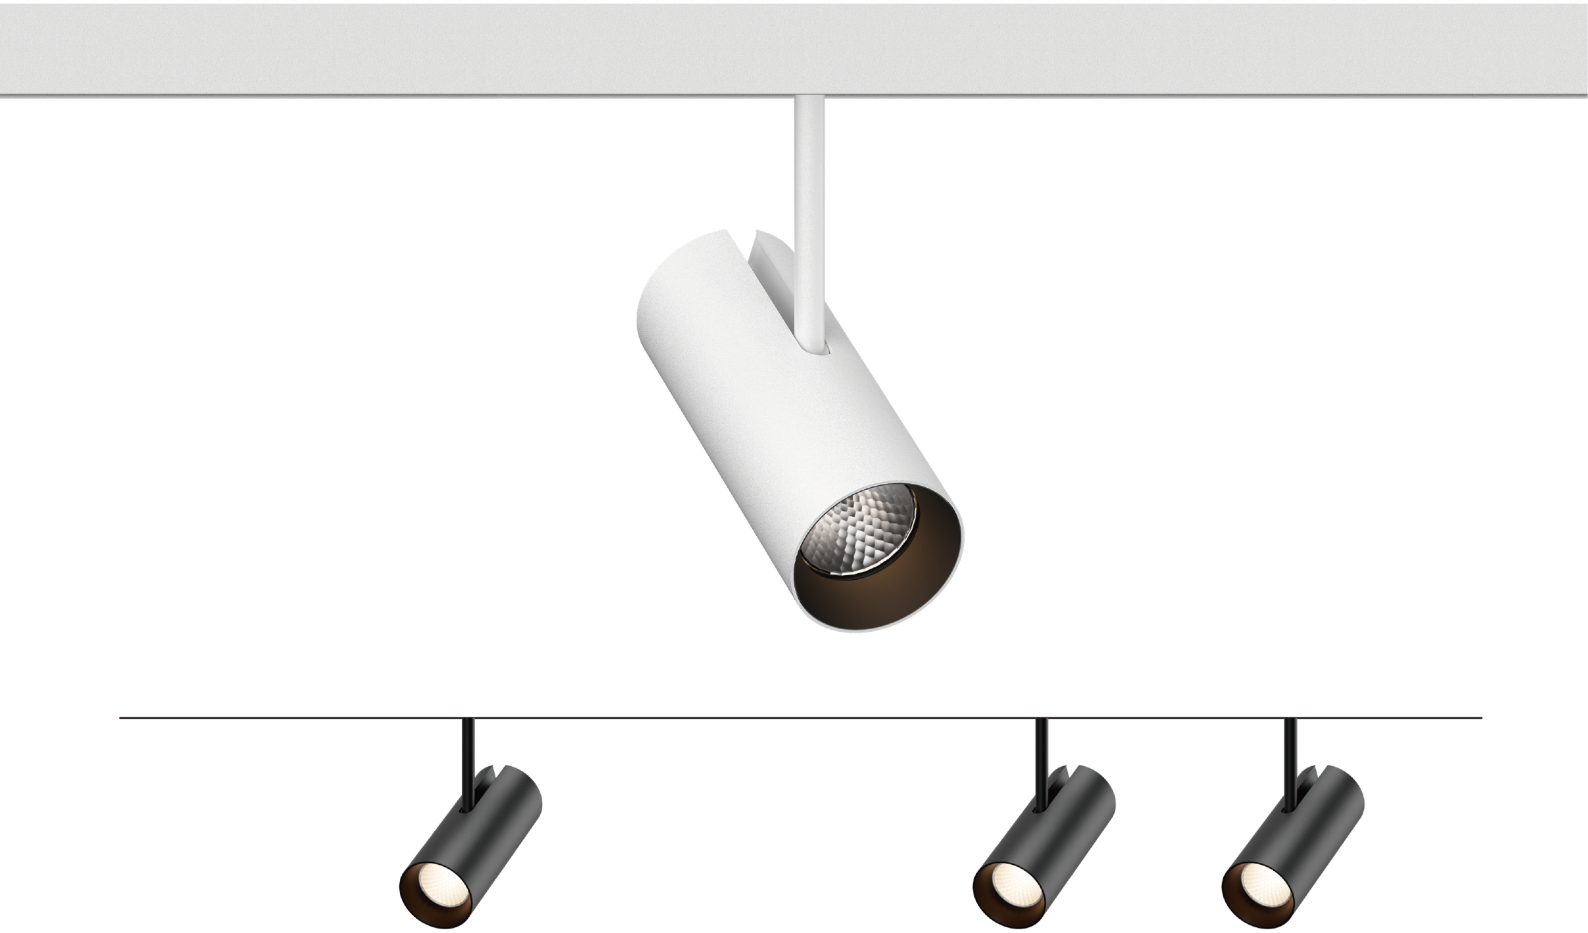


INTERCHANGEABLE


DALI
DT8


TRIAC


DIMMABLE
0-10V

CASAMBI

DALI

0-10V

Triac



ON/OFF

High CRI











IP20


CE



- installation on Low Voltage Track(48V)
- Without needing tools, interchangeable in tubes, COB LED engines, lampholders, aluminum reflectors, filters and anti-glare baffle such as honeycomb and spill ring
- high efficiency reflector and COB engines to make this compact Ø60mm module up to 2000lm lumen package ideal for traditional commercial applications
- built-in DC/DC converters, offering DALI(DT6&DT8), Triac, Casambi and 0-10V dimmable solutions

OPTICS



S
α 13°-18°


M
α 24°


F
α 37°


WF
α 55°

TR11.M3-L



source W	system W	lm/W	optic	CRI
12.5W	15W	100lm/W	18°/24°/37°/55°	>90
17.5W	20W	100lm/W	18°/24°/37°/55°	>90
CCT				
2700K/3000K/4000K/1800-4000K/2700K-6500K				
Finishing(base)				
White/Black				
Finishing(tube)				
Standard / Luxury / Premium				