



Multi-dots & Linear

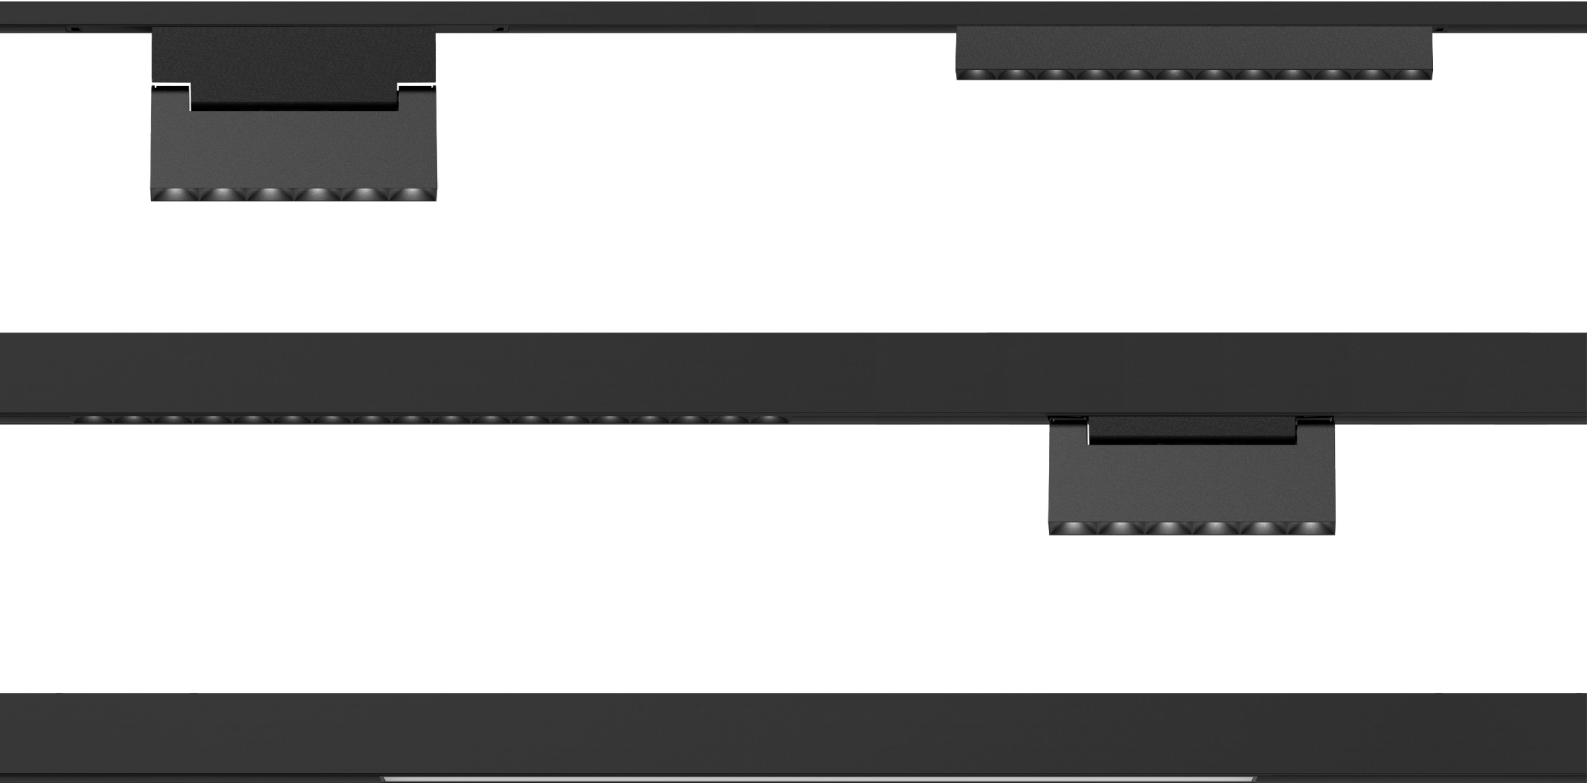


- installation on Low Voltage Track(48V)
- die-cast aluminum body with powder-coated finishing
- body itself serving as a wonderful glare controller with Grille Louvre
- installed completely inside of the high profile tracks, invisible to blend seamlessly into decorative spaces
- same texture as the suspended tracks result in a cleaner, undisturbed and refined application
- built-in DC/DC converters, offering DALI(DT6&DT8), Triac, Casambi and 0-10V dimmable solutions


OPTICS (Multi-dots)



OPTICS (Linear)




TR11.M15




| source<br>W                              | system<br>W | lm/W   | optic | CRI |
|------------------------------------------|-------------|--------|-------|-----|
| 5.4W                                     | 6.5W        | 55lm/W | 32°   | >90 |
| CCT                                      |             |        |       |     |
| 2700K/3000K/4000K/1800-4000K/2700K-6500K |             |        |       |     |
| Finishing(body)                          |             |        |       |     |
| Standard                                 |             |        |       |     |

TR11.M16




| source<br>W                              | system<br>W | lm/W   | optic | CRI |
|------------------------------------------|-------------|--------|-------|-----|
| 7.2W                                     | 9W          | 40lm/W | 32°   | >90 |
| CCT                                      |             |        |       |     |
| 2700K/3000K/4000K/1800-4000K/2700K-6500K |             |        |       |     |
| Finishing(body)                          |             |        |       |     |
| Standard                                 |             |        |       |     |

TR11.M17





| source<br>W                              | system<br>W | lm/W   | optic | CRI |
|------------------------------------------|-------------|--------|-------|-----|
| 7.2W                                     | 9W          | 45lm/W | 114°  | >90 |
| CCT                                      |             |        |       |     |
| 2700K/3000K/4000K/1800-4000K/2700K-6500K |             |        |       |     |
| Finishing(body)                          |             |        |       |     |
| Standard                                 |             |        |       |     |

TR11.M18



| source<br>W                              | system<br>W | lm/W   | optic | CRI |
|------------------------------------------|-------------|--------|-------|-----|
| 11W                                      | 13W         | 40lm/W | 32°   | >90 |
| CCT                                      |             |        |       |     |
| 2700K/3000K/4000K/1800-4000K/2700K-6500K |             |        |       |     |
| Finishing(body)                          |             |        |       |     |
| Standard                                 |             |        |       |     |

TR11.M19



| source<br>W                              | system<br>W | lm/W   | optic | CRI |
|------------------------------------------|-------------|--------|-------|-----|
| 11W                                      | 13W         | 45lm/W | 114°  | >90 |
| CCT                                      |             |        |       |     |
| 2700K/3000K/4000K/1800-4000K/2700K-6500K |             |        |       |     |
| Finishing(body)                          |             |        |       |     |
| Standard                                 |             |        |       |     |