



Specification

Indirect Lighting

Direct Lighting

Wall Wash



Brand

VIEW OF US
Worldwide Innovation Brand of Indoor LED Lighting

BRAND POSITIONING
LED Linear Lighting Solution Provider

BRAND STYLE
Concise | Trendy | Innovative

BRAND VALUE
Concentration | Profession | Acme | Innovation | Iteration

CONSIDERATION OF DESIGN
Simplification | User-friendly | Consumption

Production Facility




Wall Washing






SKYLINE



Design principles

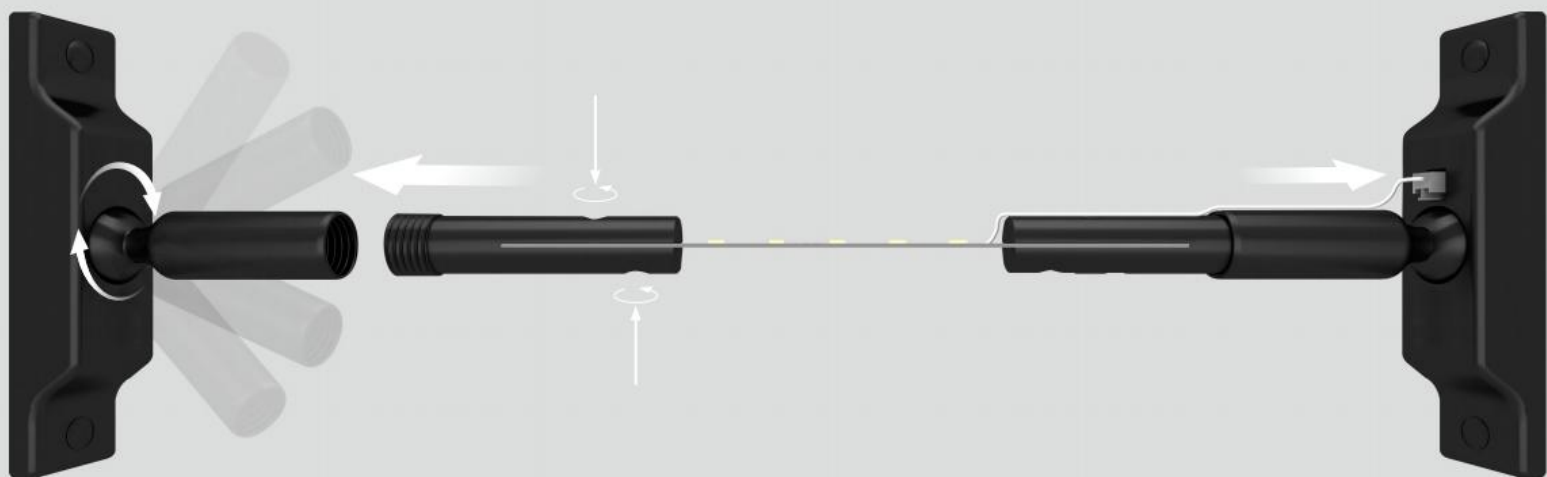


Application Guidelines

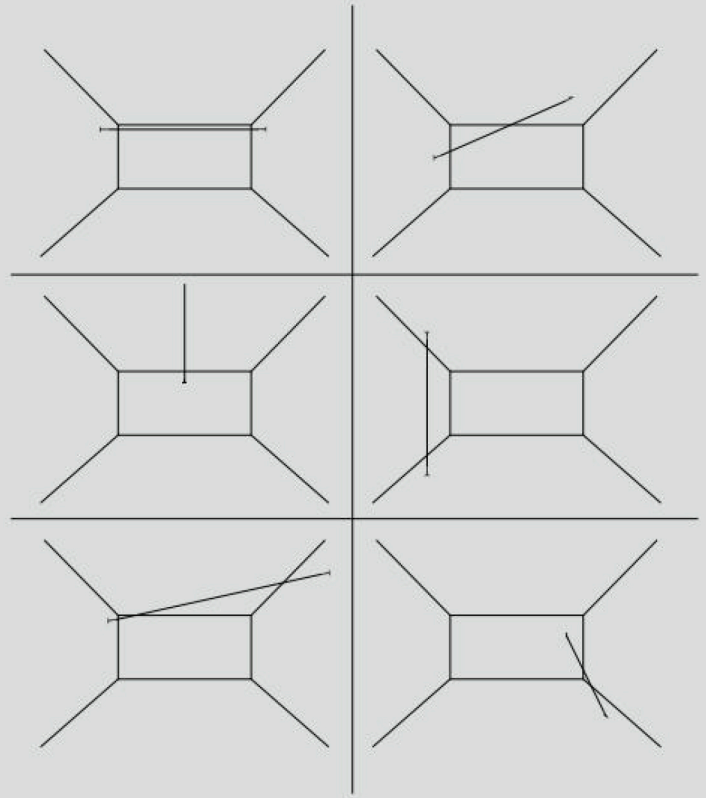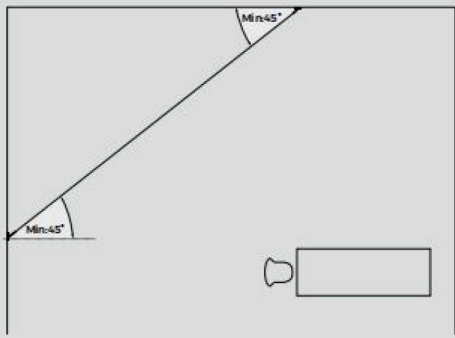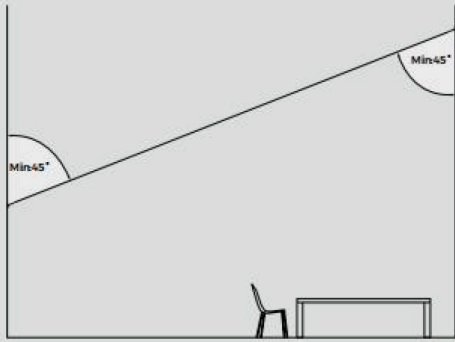

Installation guidelines

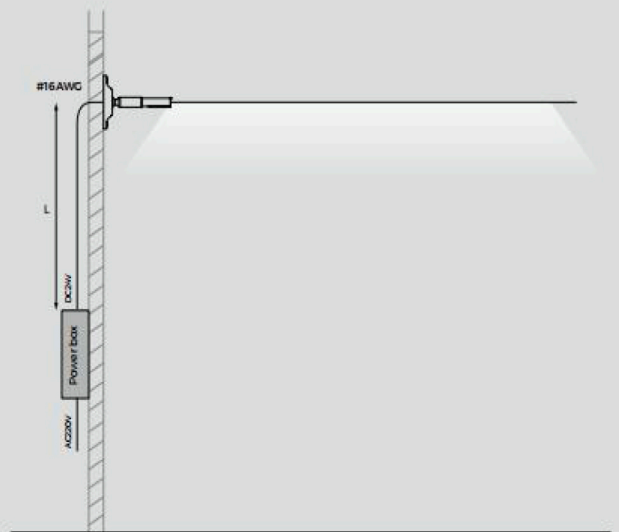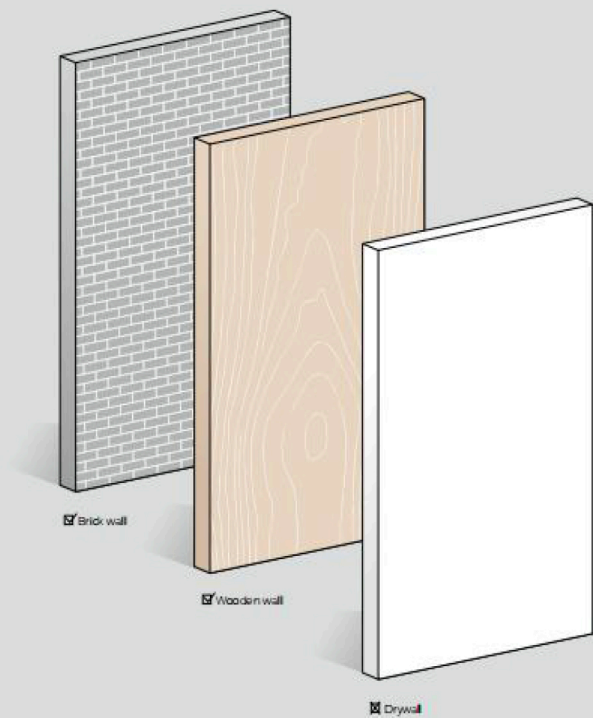

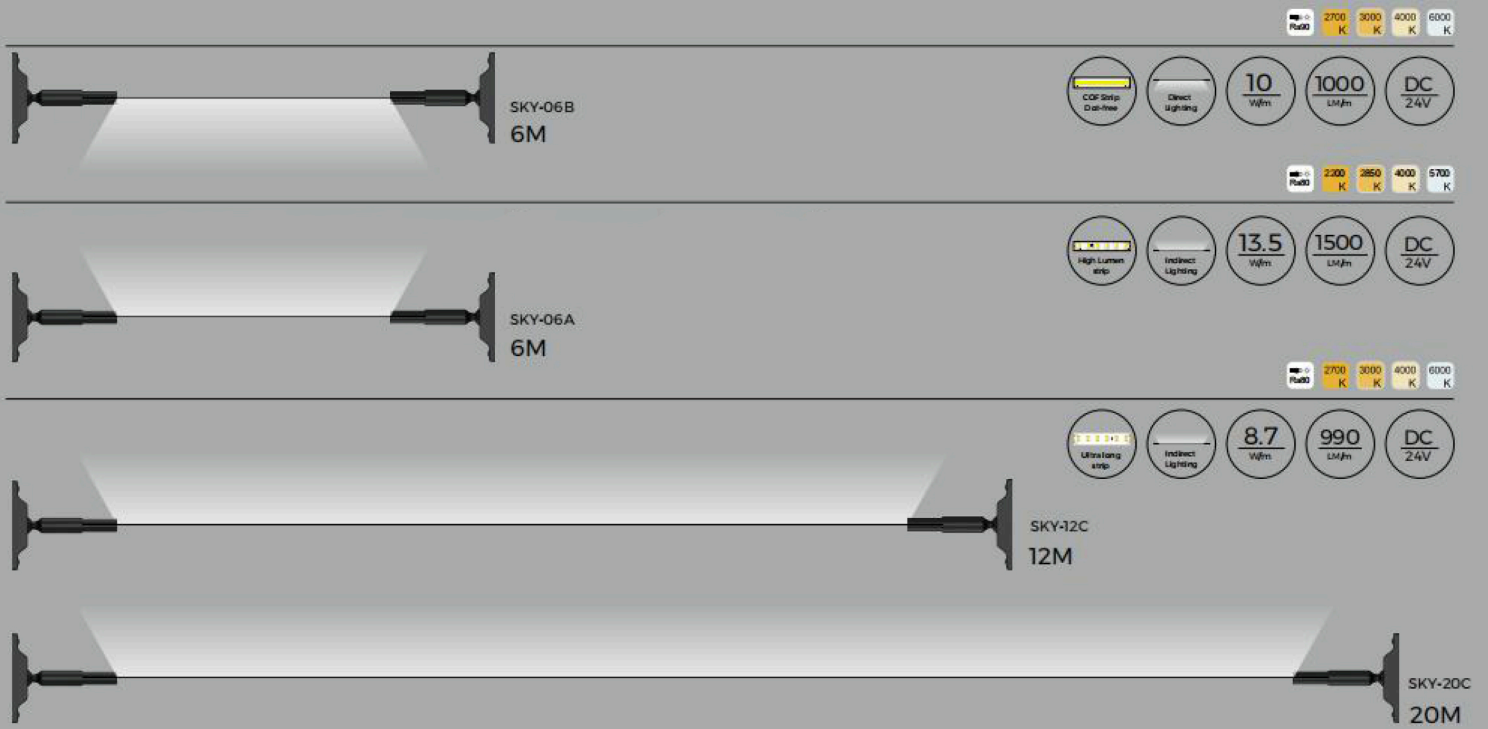

Parameters

| Model | SKY-06B | SKY-06A | SKY-12 | SKY-20 |
|-----------------|----------------------|----------------------|----------------------|----------------------|
| Length | 6M | 6M | 12M | 20M |
| Lighting source | | | | |
| Input voltage | DC24V | DC24V | DC24V | DC24V |
| CCT | 2700 K 3000 K 4000 K | 2700 K 3000 K 4000 K | 2700 K 3000 K 4000 K | 2700 K 3000 K 4000 K |
| CRI | >90 | >80 | >80 | >80 |
| Typ. power | 10W/m | 13.5W/m | 8.7W/m | 8.7W/m |
| Lumens | 1000LM/m | 1500LM/m | 990LM/m | 990LM/m |
| Color | ● ○ | ● ○ | ● ○ | ● ○ |



