


Tube 20

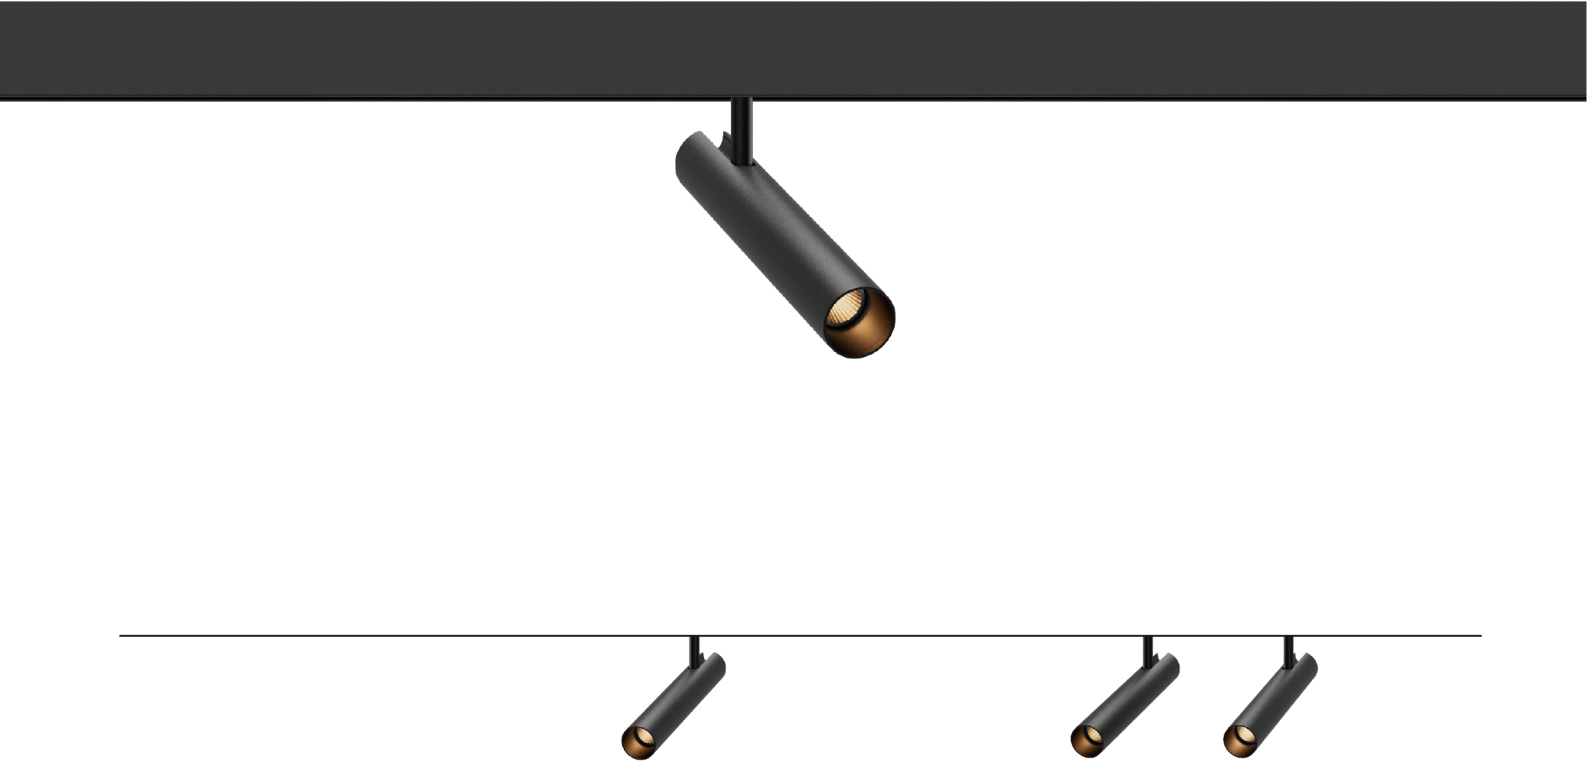


INTERCHANGEABLE


DALI
DT8


TRIAC


DIMMABLE
0-10V



DALI

0-10V

Triac



ON/OFF

High CRI











IP20

CE



- installation on Low Voltage Track(48V)
- extruded aluminum tube(case) interchangeable without needing tools, available in standard, luxury and premium finishings
- built-in DC/DC converters, offering DALI(DT6&DT8), Triac, Casambi and 0-10V dimmable solutions
- dual-head modules to enhance power, light output and aesthetic excellence

OPTICS




M
α 24°




F
α 36°

TR11.M3-XSS



source W	system W	lm/W	optic	CRI
4.2W	5W	45lm/W	24°/36°	>90
CCT				
2700K/3000K/4000K				
Finishing(base)				
White/Black				
Finishing(tube)				
Standard / Luxury / Premium				

TR11.M3-XSSD



source W	system W	lm/W	optic	CRI
4.2W×2	5W×2	45lm/W	24°/36°	>90
CCT				
2700K/3000K/4000K				
Finishing(base)				
White/Black				
Finishing(tube)				
Standard / Luxury / Premium				