

## 2 4G LED RGBW Controller


FC CE RoHS

warranty  
5 years

## Main Characteristics

## V4 RF RGBW Remote Control

Remote Option:	RGBW
Working Voltage:	3Vdc (Battery CR2032)
Wireless Frequency:	2.4GHz
Working Temperature:	-30 ~-55
Package Size:	L150×W46×H18(mm)
Weight(G.W.):	85g

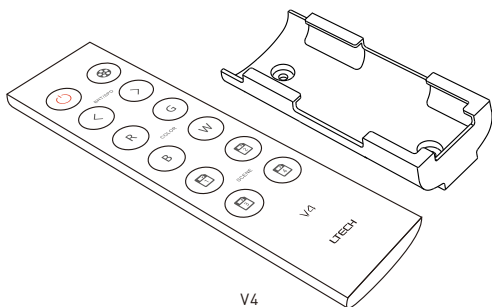


V4

## R4-5A CV Receiver

Input Voltage:	5~24Vdc
Max Current Load:	5A × 4CH Max. 20A
Max Output Power:	100W/240W/480W(5V/12V/24V)
Working Temperature:	-30 ~-55
Package Size:	L178×W48×H33(mm)
Weight(G.W.):	150g

## R4-CC CC Receiver

Input Voltage:	12~48Vdc
Output Voltage:	3~46Vdc
Output Current:	CC 350/700/1050mA×4CH
Output Power:	1.05W~48.3W×4CH Max 193.2W
Working Temperature:	-30 ~-55
Package Size:	L178×W48×H33(mm)
Weight(G.W.):	165g

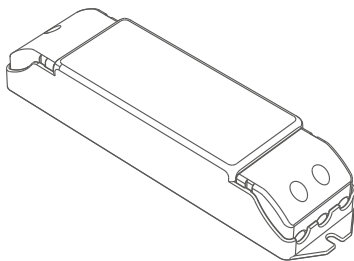


R4-5A/R4-CC


Note: Receiver is sold separately.

## Dimensions


Unit: mm



V4




Holder



R4-5A/R4-CC


## Operating Instruction for Remote:

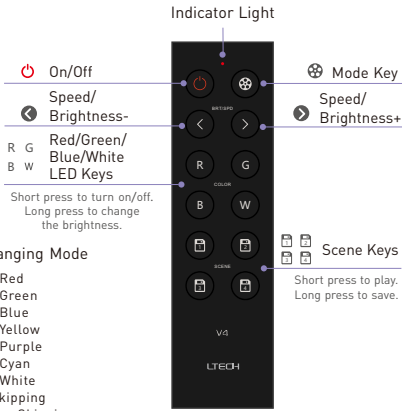


### The Changing Mode

1. Static Red
2. Static Green
3. Static Blue
4. Static Yellow
5. Static Purple
6. Static Cyan
7. Static White
8. RGB Skipping
9. 7 Colors Skipping
10. RGB Smooth
11. 7 Colors Smooth
12. Static Black (only turn off RGB)

## Operating Instruction for Receiver:

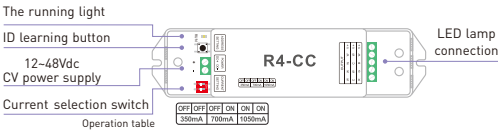

## Wiring Diagram :

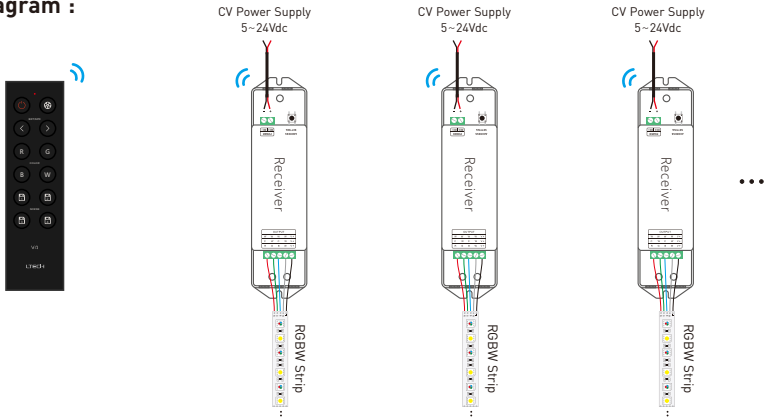


## Attention:


- Please replace the battery if the remote becomes insensitive or control distance is shortened.
- Please take out the battery for long time unused.

Match/Clear code between remotes

Match code:

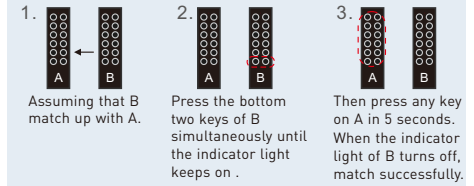


Clear code:



Match/Clear code between remote and receiver

Match code:

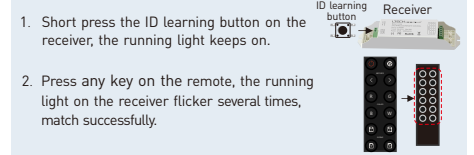

Clear code:

