
Wallwash Box Pro









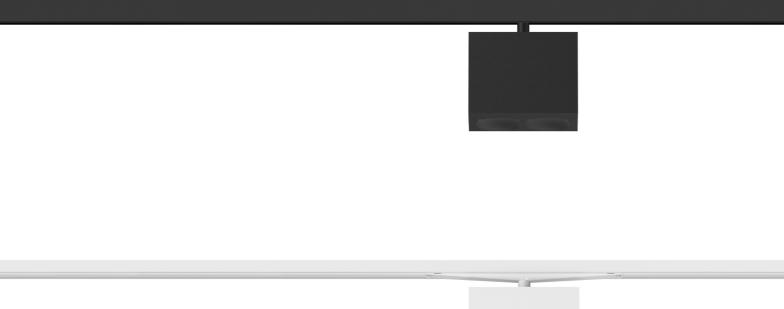





























• installation on Low Voltage Track(48V)

- the innovative wall washer optic was designed to ensure uniform lighting of walls from the highest to the lowest points, as well as avoiding shadow areas in zones near the ceiling
- the die-cast aluminum body with powder-coated texture finishings offer both aesthetic appeal and long-lasting protection
- built-in DC/DC converters, offering DALI(DT6&DT8), Triac, Casambi and 0-10V dimmable solutions
- long-stem & short-stem are available for elegant applications


OPTICS

The innovative wall washer optic was designed to ensure uniform lighting of walls, from the highest to the lowest points, as well as avoiding shadow areas in zones near the ceiling.



CORRECT INSTALLTION

Correct installation distances to achieve uniform lighting of the walls. For installation criteria, refer to the instruction sheet.



TR11.M23 (short-stem for low-profile tracks only)



ource V	system W	Im/W	optic	CRI	
2.5W	15W	60lm/W	wallwash	>90	

2700K/3000K/4000K/1800-4000K/2700K-6500K

Finishing(base)

White/Black

Finishing(body)

Standard



TR11.M23-1

source W	system W	Im/W	optic	CRI
12.5W	15W	60lm/W	wallwash	>90

2700K/3000K/4000K/1800-4000K/2700K-6500K

Finishing(base)

White/Black

Finishing(body)

