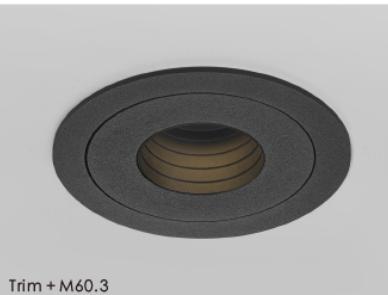

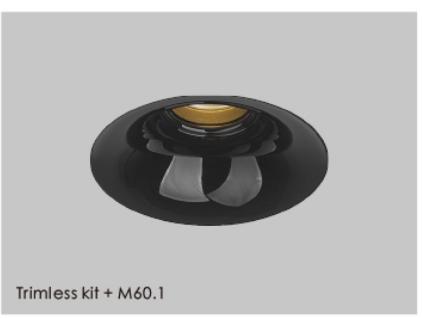






Trim + M60.1

**Item Code:** M60.1**Key Features:** Integrated with Ceiling; Magnetic anti-glare bezel, interchangeable easily**System Power:** Max.12W**Color Temperature:** Regular ones, DTW & Tunable White**CRI:** >90**IP Rating:** IP43 (IP54 & IP65 can be customised)**Forward Voltage(V) & LED Current(mA):** 34Vdc & 250mA(Max.300mA)**To be ordered separately:** 1) Mounting Kits; 2) Anti-glare bezel; 3) Constant current driver


Trim + M60.3

**Item Code:** M60.3**Key Features:** Pin hole, Matt black step bezel for great glare control**System Power:** Max.12W**Color Temperature:** Regular ones, DTW & Tunable White**CRI:** >90**IP Rating:** IP43 (IP54 & IP65 can be customised)**Forward Voltage(V) & LED Current(mA):** 34Vdc & 250mA(Max.300mA)**To be ordered separately:** 1) Mounting Kits; 2) Constant current drive

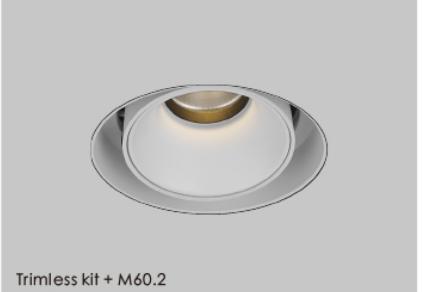

Trimless kit + M60.1

**Reflectors****Bezel Options**

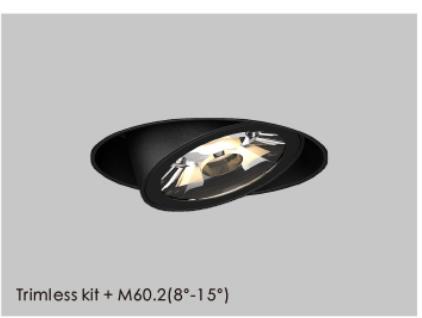

Trim + M60.2

**ITEM CODE:** M60.2**Key Features:** Tilttable & adjustable**System Power:** Max.8W**Color Temperature:** Regular ones, DTW & Tunable White**CRI:** >90**IP Rating:** IP43 (IP54 & IP65 can be customised)**Forward Voltage(V) & LED Current(mA):** 36Vdc & 180mA(Max.200mA)**To be ordered separately:** 1) Mounting Kits; 2) Constant current driver

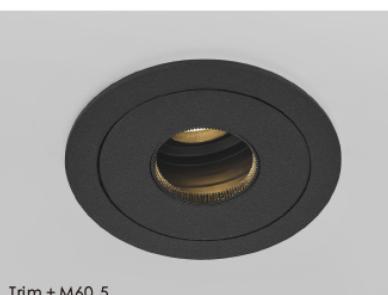
Trim + M60.4

**Item Code:** M60.4**Key Features:** adjustable Pin hole, Oval aperture, special control system**System Power:** Max.8W**Color Temperature:** Regular ones, DTW & Tunable White**CRI:** >90**IP Rating:** IP43 (IP54 can be customised)**Forward Voltage(V) & LED Current(mA):** 36Vdc & 180mA(Max.200mA)**To be ordered separately:** 1) Mounting Kits; 2) Constant current driver


Trimless kit + M60.2

**Reflectors**

Trimless kit + M60.2(8°-15°)



Trim + M60.5

**Item Code:** M60.5**Key Features:** adjustable Pin hole, round aperture, special control system**System Power:** Max.8W**Color Temperature:** Regular ones, DTW & Tunable White**CRI:** >90**IP Rating:** IP43 (IP54 can be customised)**Forward Voltage(V) & LED Current(mA):** 36Vdc & 180mA(Max.200mA)**To be ordered separately:** 1) Mounting Kits; 2) Constant current driver**Reflectors**