



Trim + M60.12



Trimless kit + M60.12

Item Code: M60.12

Key Features: Cone shape, deliver smooth and comfortable lighting effect

System Power: 12W


Color Temperature: Regular ones, DTW & Tunable White

CRI: >90


IP Rating: IP43 (IP54 & IP65 can be customised)

Forward Voltage(V) & LED Current(mA): 34Vdc & 250mA



To be ordered separately: 1) Mounting Kits; 2) Constant current driver



Reflectors

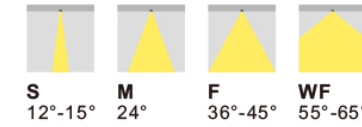

Bezel Options

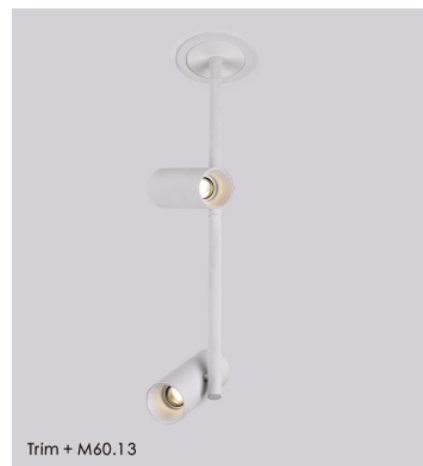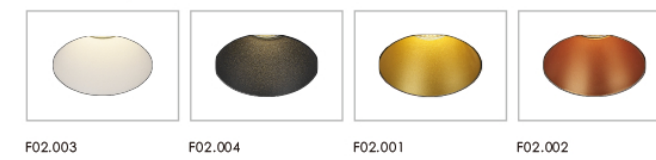

Trim + M60.13



Trimless kit + M60.13

Item Code: M60.13

Key Features: Tiltable & adjustable, 16 kinds of different finishings for Tube; Magnetic anti-glare bezel, interchangeable easily

System Power: 10W x 2

Color Temperature: Regular ones

CRI: >90

IP Rating: IP43 (IP54 & IP65 can be customised)


Forward Voltage(V) & LED Current(mA): 36Vdc & 200mA(Max.250mA)

Base Finishing: Sand White/Sand black



To be ordered separately: 1) Mounting Kits; 2) Anti-glare Bezel; 3) Constant current driver

Tube Finishing: Refer to M60.6 (P25)

Bezel Options: Refer to M40.6 (P13)

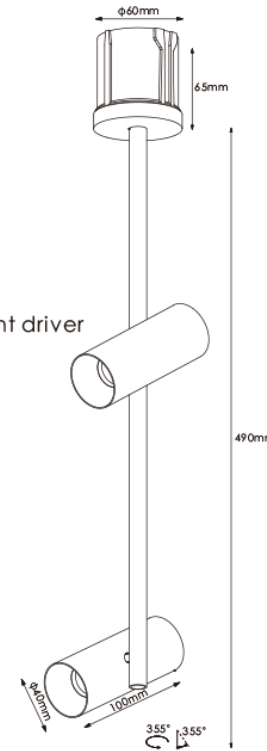

Reflectors

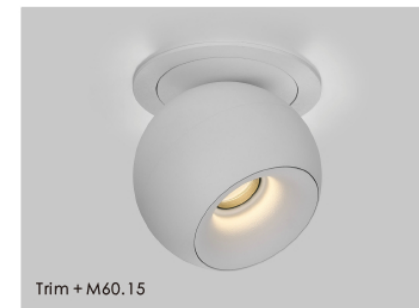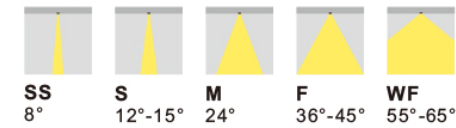

Trim + M60.15



Trimless kit + M60.15

Item Code: M60.15

Key Features: Semi-recessed projector, Tiltable & adjustable, 16 kinds of different finishings for sphere; Magnetic anti-glare bezel, interchangeable easily

System Power: Max.12W

Color Temperature: Regular ones, DTW & Tunable White

CRI: >90


IP Rating: IP43 (IP54 & IP65 can be customised)

Forward Voltage(V) & LED Current(mA): 36Vdc & 250mA(Max.300mA)


Sphere Finishing: Refer to M60.6 (P25)

Bezel Options: Refer to M80.1 (P51)


To be ordered separately: 1) Mounting Kits; 2) Anti-glare Bezel; 3) Constant current driver



Reflectors

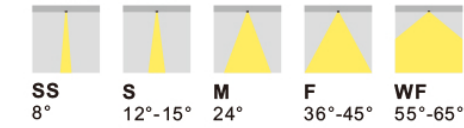

Bezel Options

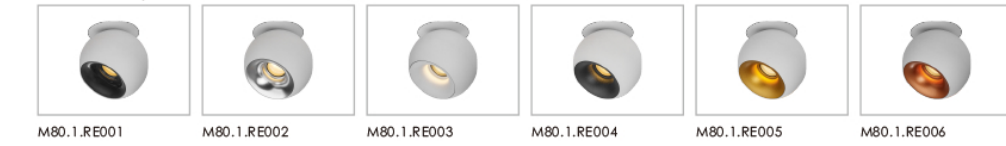

Trim + M60.16



Trimless kit + M60.16

Item Code: M60.16

Key Features: Semi-recessed projector, Tiltable & adjustable, 16 kinds of different finishings for sphere; Magnetic anti-glare bezel, interchangeable easily

System Power: Max.15W

Color Temperature: Regular ones, DTW & Tunable White

CRI: >90


IP Rating: IP43 (IP54 & IP65 can be customised)

Forward Voltage(V) & LED Current(mA): 36Vdc & 350mA


Sphere Finishing: Refer to M60.6 (P25)

Bezel Options: Refer to M80.1 (P51)

To be ordered separately: 1) Mounting Kits; 2) Anti-glare Bezel; 3) Constant current driver



Reflectors

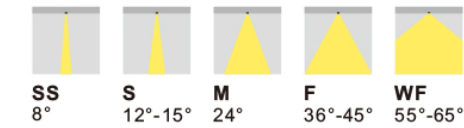

Bezel Options

