


Item Code: M60.30

Key Features: Louvre linear with an excellent glare control; Tilttable 0-355° & adjustable 0-90° , ideal for general lighting and wallwash as well

Color Temperature: 2700K / 3000K / 4000K


CRI: > 90

To be ordered separately: 1) Mounting Kits; 2) Constant current driver



Order Code	Dimension(mm)	Power	mA&Vdc
M60.30-1	220x22x25	12W	250mA, 36VDC
M60.30-2	328x22x25	18W	400mA, 36VDC
M60.30-3	438x22x25	24W	600mA, 36VDC

Beam Angle



M 24° **F** 36°-45°

Trimlesskit + M60.30


Item Code: M60.31

Key Features: Diffuse linear, Tilttable 0-355° & adjustable 0-90° , ideal for general lighting and wallwash as well

Color Temperature: 2700K / 3000K / 4000K

CRI: > 90

To be ordered separately: 1) Mounting Kits; 2) Constant current driver

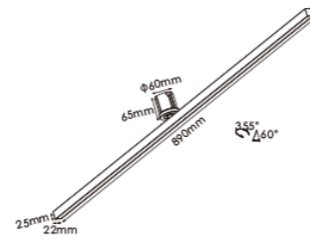

Order Code	Dimension(mm)	Power	mA&Vdc
M60.31-1	220x22x25	12W	250mA, 36VDC
M60.31-2	328x22x25	18W	400mA, 36VDC
M60.31-3	436x22x25	24W	600mA, 36VDC
M60.31-4	890x22x25	30W	700mA, 36VDC

Beam Angle



EWF 120°

Trimlesskit + M60.31


Item Code: M60.32

Key Features: Smart LED T5 tube, Tilttable 0-355° & adjustable 0-90° , ideal for general lighting and wallwash as well. It can be equipped with special CCT led chips to work as an indirect lighting and an atmosphere luminaire

Color Temperature: 2700K / 3000K / 4000K / customised for special color

CRI: > 90

To be ordered separately: 1) Mounting Kits; 2) Constant current driver

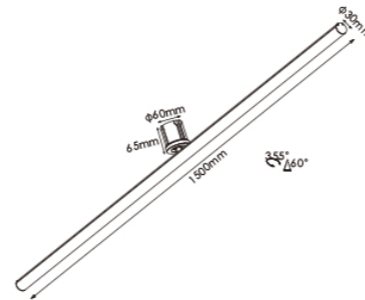

Order Code	Dimension(mm)	Power	mA&Vdc
M60.32-1	φ30xL300	6W	200mA, 36VDC
M60.32-2	φ30xL600	10W	250mA, 36VDC
M60.32-3	φ30xL900	15W	350mA, 36VDC
M60.32-4	φ30xL1200	20W	500mA, 36VDC
M60.32-5	φ30xL1500	24W	600mA, 36VDC

Beam Angle



EWF 120°

Trimlesskit + M60.32

