


MA-C

APPLICATIONS:
Open-plan office, breakout area,
cafeteria, guest room, etc.



- Microprism, UGR<19
- Direct and Indirect lighting with impressive light uniformity
- Easy for installation and maintenance

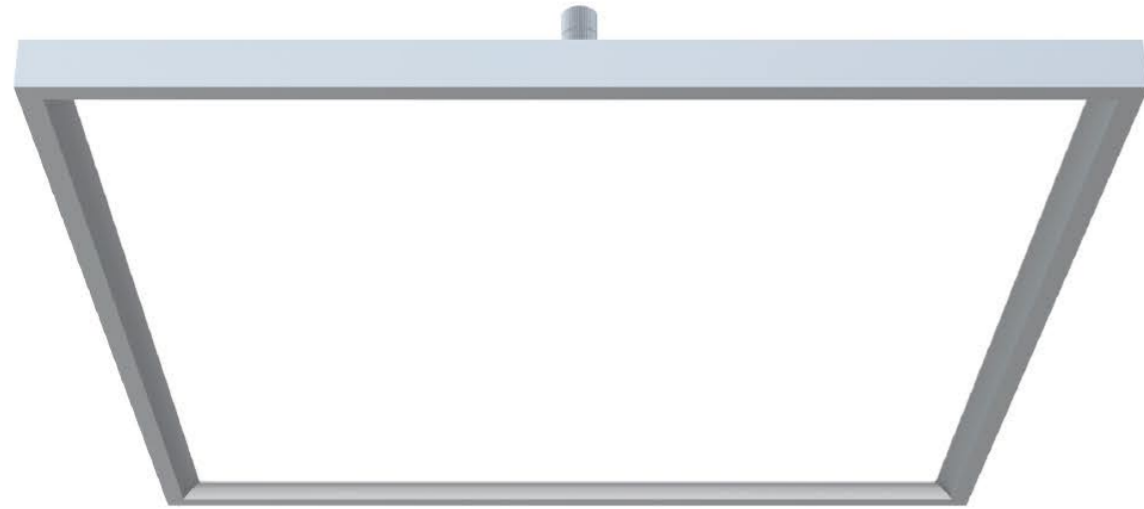


PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	5300 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years

PRODUCT MODEL

Part No.	LM	Power	Function
MA-C-60	↑ 1300lm/4000lm ↓	↑ 10W/50W ↓	On/off
MA-C-60-1-10V	↑ 1300lm/4000lm ↓	↑ 10W/50W ↓	1-10V dimming
MA-C-60-DALI	↑ 1300lm/4000lm ↓	↑ 10W/50W ↓	DALI dimming

SIZE

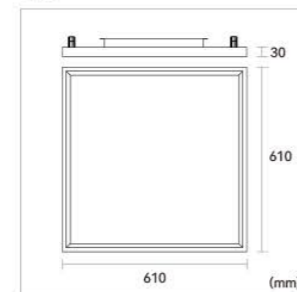

LIGHT DISTRIBUTION

