

PRO12-P-Z

-  IP67
-  IK04
-  Class III
-  CE certification
-  ETL certification
-  SALT SPRAY TESTED (over 1000 hours)
-  Net Weight 0.6kgs
-  Rubber cable 1M 2*0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  3 Years Warranty





Passivated+Painted available colour for housing:



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
12 Watt	900 lm @15°	2700K	Zoom 15° to 36° Zoom 35° to 60°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in dark grey as standard or coffee silver, Black, white
	1000 lm @36°	3000K				
	900 lm @35°	4000K				
	1000 lm @60°	6000K				

Dimension

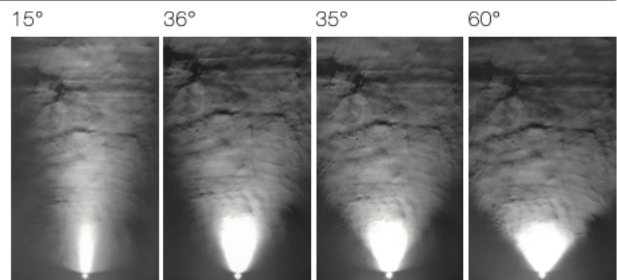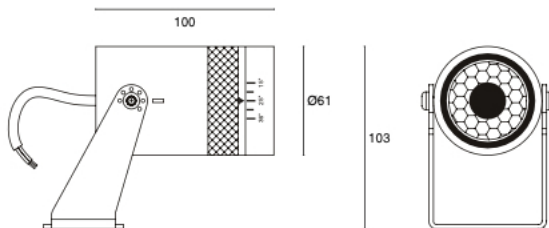

Accessories

Spike-205



Optional

Round base D80



Optional

Pole300mm/500mm/750mm



Optional