

PRO25-P-Z

-  IP67
-  IK04
-  Class III
-  CE certification
-  SALT SPRAY TESTED (over 1000 hours)
-  Net Weight 1.7kgs
-  Rubber cable 1M 2*0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  3 Years Warranty





Passivated+Painted available colour for housing:



• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
25 Watt	1800 lm @15° 2500 lm @36° 1800 lm @35° 2150 lm @60°	2700K 3000K 4000K 6000K	Zoom 15° to 36° Zoom 35° to 60°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in dark grey as standard or coffee silver, Black, white

• Dimension

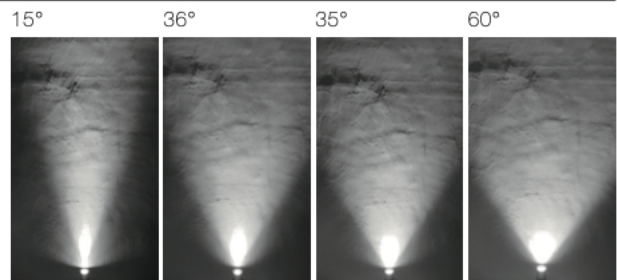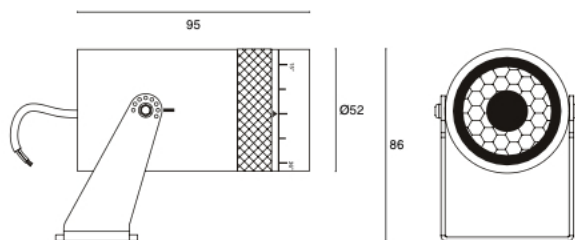

• Accessories

Spike-205



Optional