

PRO4-P-Z

-  IP67
-  IK04
-  Class III
-  CE certification
-  ETL certification
-  SALT SPRAY TESTED (over 1000 hours)
-  Net Weight 0.4kgs
-  Rubber cable 1M 2*0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  3 Years Warranty




Passivated+Painted available colour for housing:



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
4 Watt	130 lm @15° 230 lm @36°	2700K 3000K 4000K 6000K	Zoom 15° to 36°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in dark grey as standard or coffee silver, Black, white


Dimension

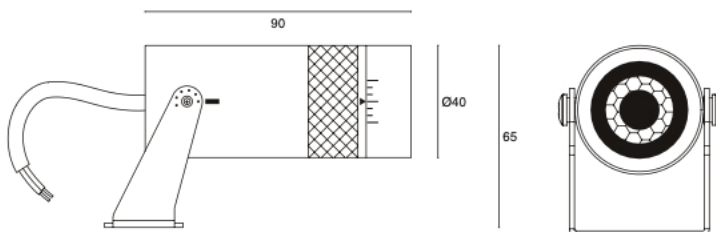

15°



36°



Accessories

Spike-205



Optional

Round base D80



Optional

Pole300mm/500mm/750mm



Optional