


ROM-P0

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.



- Patent design, simple design style, rich texture
- Light efficiency up to 148lm/W
- Support DALI and 1-10V dimming

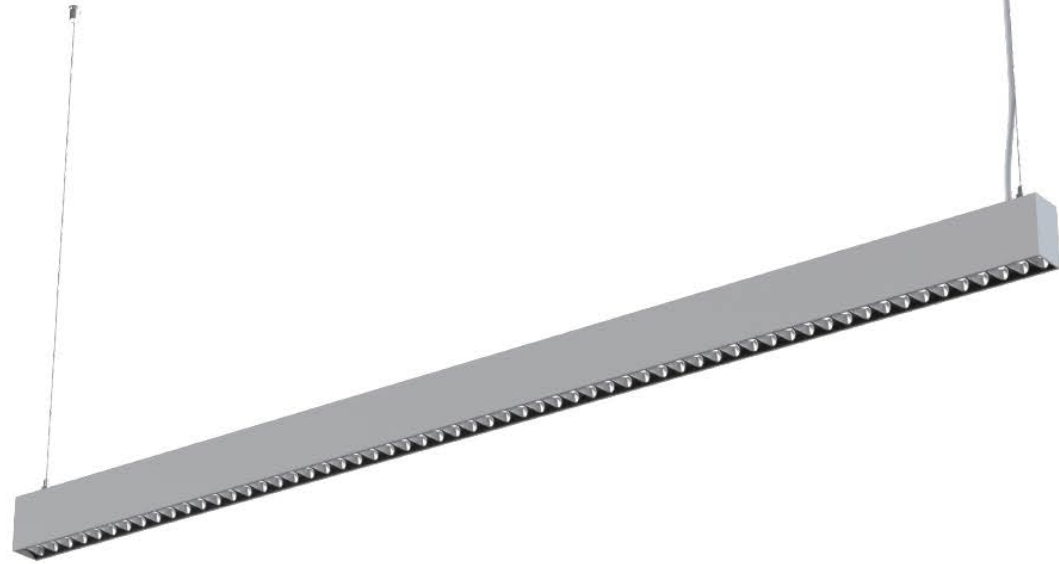


PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	8910lm	10400lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑ 115° / 60° ↓	
UGR	<15	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL

Part No.	LM	Power	Function
ROM-P0-60	↑ 6010lm/2900lm ↓	↑ 36W/24W ↓	On/off
ROM-P0-60-1-10V	↑ 6010lm/2900lm ↓	↑ 36W/24W ↓	1-10V dimming
ROM-P0-60-DALI	↑ 6010lm/2900lm ↓	↑ 36W/24W ↓	DALI dimming
ROM-P0-70	↑ 7000lm/3400lm ↓	↑ 42W/28W ↓	On/off
ROM-P0-70-1-10V	↑ 7000lm/3400lm ↓	↑ 42W/28W ↓	1-10V dimming
ROM-P0-70-DALI	↑ 7000lm/3400lm ↓	↑ 42W/28W ↓	DALI dimming

SIZE

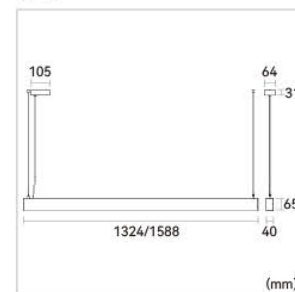

LIGHT DISTRIBUTION

