


Zoom



CASAMBI

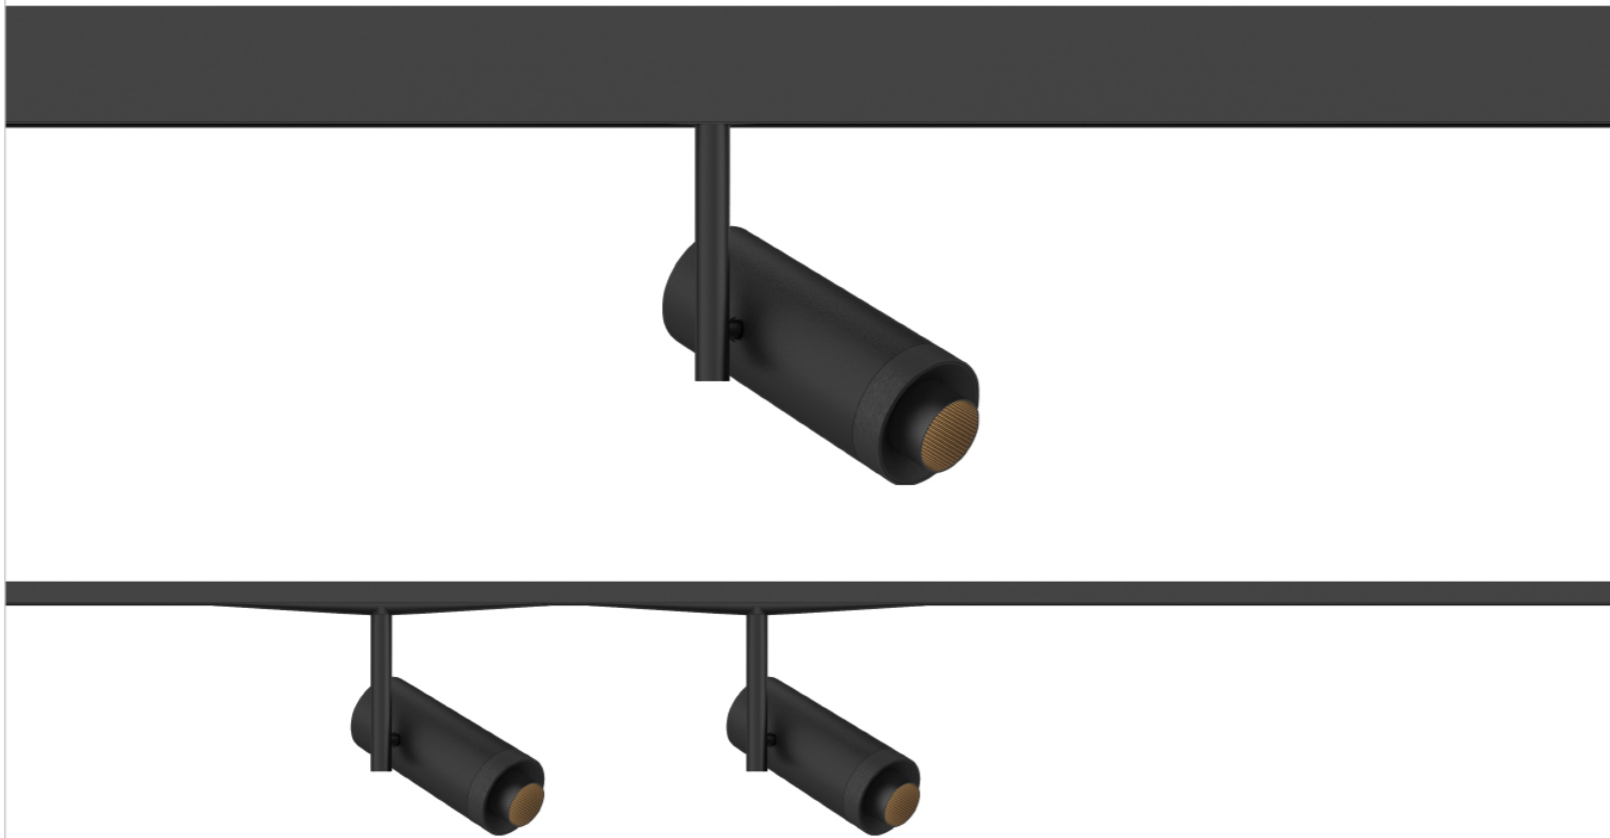

- Discover the perfect balance of innovation and elegance with the Adjustable Mini Spot, designed for seamless integration into 48V low voltage track systems.
- Precision Lighting Control: Equipped with a die-cast aluminum heat sink and passive dissipation system, ensuring optimal performance and longevity.
- Advanced Dimming Options: The plastic adapter features built-in DC/DC converters, offering DALI, Casambi, phase-cut, and 0-10V dimmable solutions. With an integrated Casambi module, enjoy independent control over dimming and switching for each spotlight.
- Flexible Adjustability: Featuring 355° rotation and 90° vertical tilt for precise directional lighting.


- Glass convex lens beam system zooming from 10° up to 50° through a brushed black anodized aluminum ring.
- Built-in filmed tempered frosted glass cover helps to produce a soft and uniform light distribution.
- High vision comfort with black corrugated anti-glare baffle.
- Fast-acting electrical and mechanical connection system to mount the adapter on the track without needing tools.
- Various finishings in extruded aluminum body for all kinds of applications. The classic and quality texture sand black/sand white, high glossy black/blue/rose with PVD coatings and luxurious anodized finishings, such as brushed champagne, brushed bronze and brushed gold.

ZOOM


The optical system combined with the possibility of manual adjustment means a well-defined point lighting can be obtained, without halos and imperfections.



Manual rotation of the locknut without the need for tools



10° zoomed counterclockwise at the highest point



50° zoomed clockwise at the lowest point

TR11.M11



source W	system W	lm/W	optic	CRI
9W	10.5W	45lm/W	10°- 50°	> 90

CCT

2700K/3000K/4000K/1800-4000K/2700K-6500K

Finishing(base)

White/Black

Finishing(tube)

P01-P05; A01-A10; EP01-EP04

