

CONE 60




CASAMBI



- Discover the perfect balance of innovation and elegance with the Adjustable Mini Spot, designed for seamless integration into 48V low voltage track systems.
- Precision Lighting Control: Equipped with a die-cast aluminum heat sink and passive dissipation system, ensuring optimal performance and longevity.
- Advanced Dimming Options: The plastic adapter features built-in DC/DC converters, offering DALI, Casambi, phase-cut, and 0-10V dimmable solutions. With an integrated Casambi module, enjoy independent control over dimming and switching for each spotlight.
- Flexible Adjustability: Featuring 355° rotation and 90° vertical tilt for precise directional lighting.

- High-Quality Optics: Choose from a range of aluminum reflectors with standard beam angles of 24°, 37°, and 60°, or customize with narrower 10° and 15° options for focused illumination.
- Superior Light Efficiency: Filmed tempered glass covers in clear or frosted variants provide anti-glare control while enhancing light output.
- Effortless Installation: The fast-acting mechanical and electrical connection system ensures tool-free installation onto the track.
- Premium Finish Options: Available in classic sand black/white, high-gloss black/blue/rose with PVD coatings.
- Magnetic Reflector Bezels: Offering tool-free installation and maintenance, the magnetic bezels are available in multiple colors, allowing seamless integration into any décor scheme.

Optics

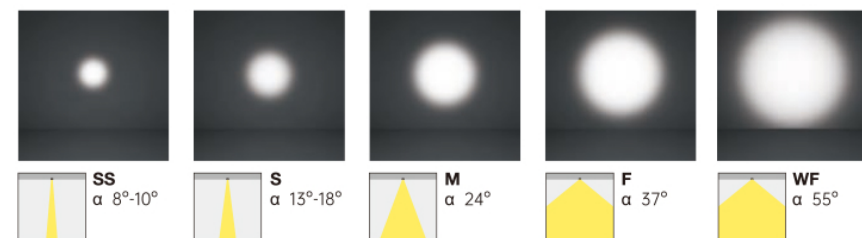



Bezel Options



Accessories




TR11.M7



source W	system W	lm/W	optic	CRI
9W	10.5W	85lm/W	10°/15°/24°/37°/55°	> 90
12.5W	15W	80lm/W	10°/15°/24°/37°/55°	> 90
CCT				
2700K/3000K/4000K/1800-4000K/2700K-6500K				
Finishing(base)				
White/Black				
Finishing(cone)				
P01-P05; A01-A10; EP01-EP04				

TR11.22



source W	system W	lm/W	optic	CRI
9W	10.5W	85lm/W	10°/15°/24°/37°/55°	> 90
12.5W	15W	80lm/W	10°/15°/24°/37°/55°	> 90
CCT				
2700K/3000K/4000K/1800-4000K/2700K-6500K				
Finishing(base)				
White/Black				
Finishing(cone)				
P01-P05; A01-A10; EP01-EP04				