






**IP67 IK08**

**SSS 316** Patent **3 Years Warranty**  
 Used as inground lights, deck lights !


Parameter .....

General Data	
Item No.	EES3-IND
Power	2.6 Watts +10%
LED type	6 PCS LUMILEDS 2835 SMD LED
Luminous flux	/
CCT	2700K, 3000K, 4000K, 5700K, 6500K
CRI	80+
Beam angle	50°
Dimension	Ø110x35 (mm) Diameter x length
Cut out	Ø98 mm with sleeve, Ø95mm with clip
Net weight	0.55 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1 mm square
Driver	Low constant voltage input driver, constant current output for LEDs
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK08
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey
Trim	Stainless steel 316
Glass	Step tempered Glass.T=8mm.
Loading capacity	500 kgs
Cable Gland	PG gland
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Passivated (Anodizing) Aluminum CNC machined. Dark grey
Clip	With spring as options, that's for wall lights, deck lights application


Dimension .....

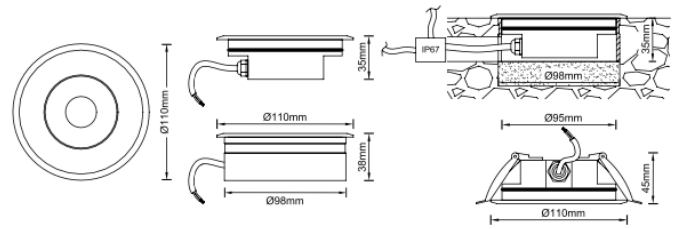

Light Distribution Curve (3000K, 50°) .....

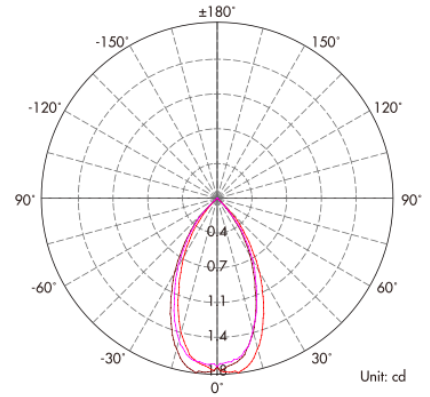

Lux distance Curve (3000K, 50°) .....

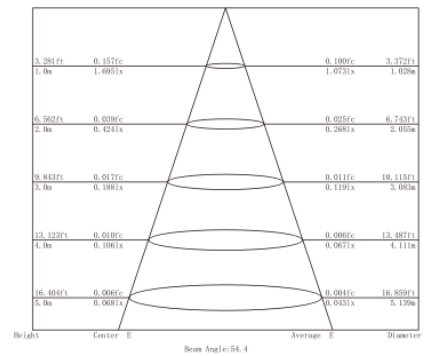

Illumination Picture (50°) .....

